

MINING

BEVEDOL S21 – BEVEDAN 1F

TWO-COMPONENT INJECTION RESIN

DESCRIPTION

BEVEDOL S21 F is a fast reacting two-component injection resin, free of CFCs.

BEVEDOL S21 is a mixture of various polyols and additives which reacts with BEVEDAN 1F to form a tough/hard polyurethane resin foam. BEVEDAN 1F is a modified polyisocyanate.



APPLICATION AND USE

Adhesive class: instantaneous

For solidification of largely loosened, dry or slightly moist strata zones.

To be used for cracks of more than 0.14 mm width.

- Rock stabilization
- Injections bolting
- Sealing against gas

ADVANTAGES

- Rapid reaction time
- Excellent adhesive strength
- High mechanical resistance

TECHNICAL DATA

The data below are laboratory data. They may vary in practice due to thermal exchange between resin and strata, surface properties of the stone, humidity, pressure, and other factors.

MATERIAL DATA

Parameter	Unit	BEVEDOL S21	BEVEDAN 1F	Standard
Density at 25 °C	kg/m ³	960 ± 50	1200 ± 30	DIN 12791-1
Colour	-	honey	dark brown	-
Flash point	°C	> 140	> 150	DIN 53213
Viscosity at 5 °C	mPa*s	930 ±150	1530 ± 200	ISO 3219
Viscosity at 10 °C	mPa*s	600 ±120	920 ± 150	ISO 3219
Viscosity at 15 °C	mPa*s	420 ± 90	550 ± 120	ISO 3219
Viscosity at 20 °C	mPa*s	290 ± 70	400 ± 90	ISO 3219
Viscosity at 25 °C	mPa*s	210 ± 50	270 ± 50	ISO 3219
Viscosity at 30 °C	mPa*s	160 ± 50	200 ± 50	ISO 3219


REACTION DATA

Starting temperature	Start of foaming	End of foaming	Foaming factor	Standard
5 °C	1 min 20 s ± 20 s	2 min 25 s ± 25 s	1.3 - 2.4	MCT PV 10-301
10 °C	1 min 20 s ± 10 s	1 min 50 s ± 25 s	1.3 - 2.4	MCT PV 10-301
15 °C	55 s ± 15 s	1 min 35 s ± 20 s	1.3 - 2.4	MCT PV 10-301
20 °C	55 s ± 15 s	1 min 20 s ± 20 s	1.3 - 2.4	MCT PV 10-301
25 °C	50 s ± 15 s	1 min 20 s ± 20 s	1.3 - 2.4	MCT PV 10-301
30 °C	30 s ± 5 s	55 s ± 15 s	1.3 - 2.4	MCT PV 10-301
Max. reaction temperature (30 °C)		122 °C	GesBergV	

MECHANICAL DATA

Determination under application conditions:

- Volume rate 10 l/min CT-PM remote dredging pump
- BVS40 SM
- Strength investigation dry (Class I)

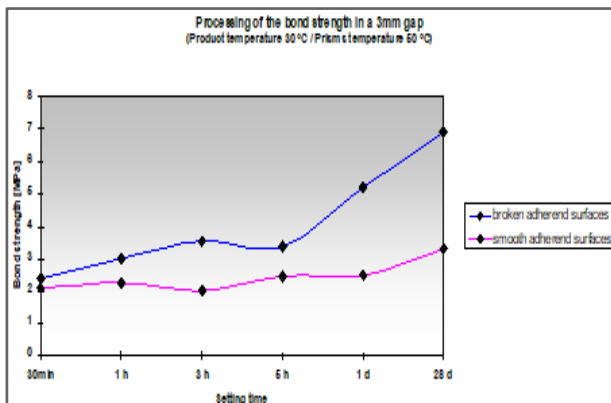

BOND STRENGTH

Setting time	Unit	30 min	1 h	3 h	5 d	1 d	28 d
Bond strength - broken adherend surfaces	MPa	2.38	2.99	3.55	3.36	5.2	6.9
Bond strength - smooth adherend surfaces	MPa	2.07	2.25	2.01	2.46	2.48	3.3

DEFLECTION FRACTURE

Deflection fracture, 3 mm gap	Unit	30 min	1 h	3 h	5 h	1 d	28 d
Broken adherend surfaces	mm	5.52	5.25	4.54	4.39	2.63	1.45
Smooth adherend surfaces	mm	4.28	4.19	3.06	3.23	1.78	0.73

DEFORMATION

Deformation work, 3 mm gap	Unit	30 min	1 h	3 h	5 h	1 d	28 d
Broken adherend surfaces	Nmm	2424	2906	3268	2999	3296	1998
Smooth adherend surfaces	Nmm	1897	2244	1464	1937	1208	395

STRENGTH

Parameter	Unit	24 h
Compressive strength (at 10 % compression set)	N/mm ²	3.4
Compressive strength (at 50 % compression set)	N/mm ²	8.8
Bending tensile strength (at 50 % compression set)*	N/mm ²	4.5

*The maximum mean bending tensile strength was not testable due to the long deformation path and the resulting deflection.

Classification according suitability for application in water bearing rocks

Strength investigation wet to bearing (Class II)	Unit	3 h
Bond strength	N/mm ²	2.19
Strength investigation fastmoving water (Class III)	Unit	3 h
Bond strength	N/mm ²	2.57

Parameter	Value	Standard
Oxygen index	28.4%	DIN EN ISO 4589-2

APPLICATION METHOD

The two components are pumped by a dual component pump at the volumetric ratio 1 : 1; they are mixed thoroughly in a static mixer unit prior to injection into strata via a packer installed in a previously drilled borehole.

For detailed instructions on use, in particular before a change of the injection resins, consult the brochure 'Operating instructions on proper use of Minova injection resins'.

SAFETY INSTRUCTIONS AND LIMITATIONS

Observe the usual precautionary measures for handling chemicals, see MSDS of BEVEDOL S21 and BEVEDAN 1F.

The processing temperature for can material (pump e.g. DP40) must be at least 15 °C and for IBC material (pump CT-PM) at least 20 °C.

When the material is warmed up, local overheating, e. g. at the container wall, must be avoided by any means.

PACKAGING AND TRANSPORTATION

All forms of packing are approved to the danger goods regulation road, railway, domestic shipping.

The components can be delivered in 20/26/200/1000 l units.

Other packaging units are available on request. Details are shown in the offer.

BEVEDOL S21 – BEVEDAN 1F is also available in two-component foil cartridge.

STORAGE AND SHELF LIFE

At least six months from date of delivery when stored in a dry place between 10 °C and 30 °C. If this time is exceeded, we recommend having the material checked by Minova for compliance with specification.

DISPOSAL

Follow local regulations.

APPROVALS AND CERTIFICATES

1. Report of the determination of properties (MCT, 2013)
2. Certificate bending tensile strength and compressive strength (DMT, 2013)

DISCLAIMER

The Minova Logo is a registered trademark.

Copyright © 2019 Minova. All rights reserved

The data in this sheet conform to our best knowledge and experience at the date of printing, which is indicated below. The state of knowledge and experience are evolving constantly. Please pay attention therefore, that you always refer to the current version of this data sheet.

The description of the product application in this sheet cannot take the special conditions and circumstances into account emerging from the individual case. Please check our product therefore in any case prior to use for its aptitude in the actual application. Application, use and processing of our product occur outside of our control capabilities. That is why they as well as the processing result achieved based on our information are exclusively subject to your own responsibility.

No data in this sheet constitute a guarantee in a legal sense. It is clarified that our liability is limited to the contractual acknowledgements for the purchase of this product.

This is a translation. Minova assumes no responsibility for the correctness of the translation. Only the original German version of the data sheet is binding.

MCT-605117/001015/ BEVEDOL S21 – BEVEDAN 1F_E14
(February 2019)

ADDITIONAL DOCUMENTATION

- Operating instructions on proper use of Minova injection resins
- MSDS of BEVEDOL S21 and BEVEDAN 1F

LIST OF REPRESENTATIVES

- AUSTRIA: Minova MAI GmbH
- BELGIUM / FRANCE: Minova France C/O Orica Belgium SA
- CZECH REPUBLIC: Minova Bohemia s.r.o.
- GERMANY: Minova CarboTech GmbH
- ITALY: Minova CarboTech GmbH
- KAZAKHSTAN: Minova Kazakhstan JV LLP
- NORWAY: Minova Norway C/O Orica Norway
- POLAND: Minova Ekochem S.A.
- RUSSIA: Minova Leninsk-Kuznetsky / ZAO "Carbo-ZAKK"
- SLOVAKIA: Minova Slovakia Žilina
- SOUTH AFRICA: Minova Africa (Pty) Ltd.
- SPAIN: Minova Codiv S.L.U.
- SWEDEN: Minova Nordic, C/O Nitro Consult AB
- UNITED KINGDOM: Minova International Limited (Global Head Office)
- AUSTRALIA: Minova Australia C/O Orica Technical Centre (Regional Headquarters)
- AMERICAS: Minova Georgetown (Regional Headquarters)

CUSTOMER SERVICE

For additional support options available at your area, contact our local offices.

www.minovaglobal.com